

Engineering Polymers for Metal Replacement

Lightweighting, mechanical performance, cost reduction and sustainability are some of the requirements driving the market to search for metal alternatives. Using engineering polymers for demanding **metal replacement** applications has a long and successful history at **RadiciGroup High Performance Polymers**, where our continuous focus on innovation has resulted in a very wide offering of materials.

Low density and excellent mechanical performance are typical characteristics of our materials specifically developed as metal alternatives. Moreover, engineering polymers allow for design freedom and lower part cost, owing to the potential of **function integration, modularity and reduction in post-processing time and labour**. Based on our experience and analysis, the replacement of metals with engineering polymers leads to a **significantly lower environmental impact**, thanks to the reduced weight of components, among other factors.

Function Integration


- Functional benefits through part integration
- Design possibilities even with complex parts and more opportunity for design innovation
- Better surface finish with integral colours



Oil Circuit Valve Body


Cost reduction

- Lower tooling and manufacturing costs
- Fewer post-processing operations
- Longer tool life
- Higher productivity
- Less energy demand for part production

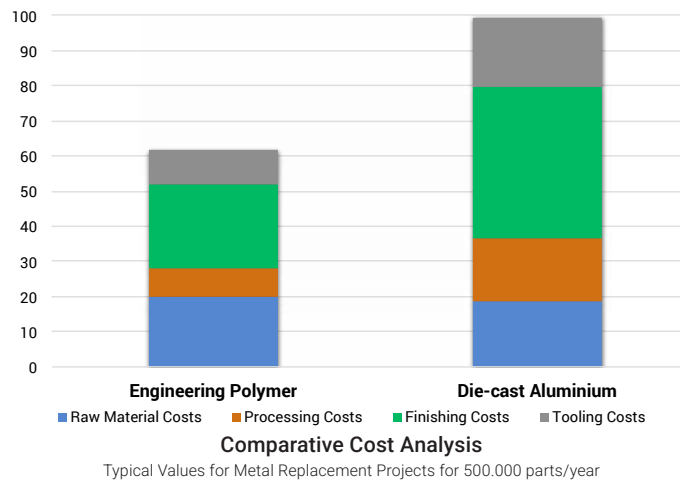

Lighter parts with high performance


- Less density
- High specific stiffness and strength
- Vibration and noise damping
- Higher corrosion and chemical resistance

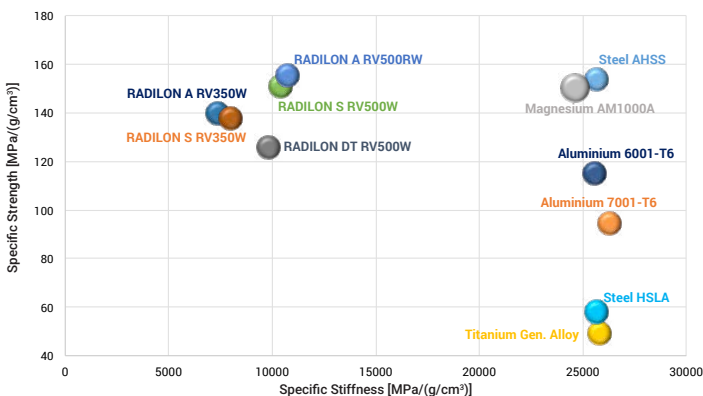

Mechanical Properties Chart

Lower environmental impact

- Lower CO₂ emissions from material production
- Lower CO₂ emissions due to lighter parts: very important for vehicle parts.
- Lower CO₂ emissions due to fewer post-processing operations

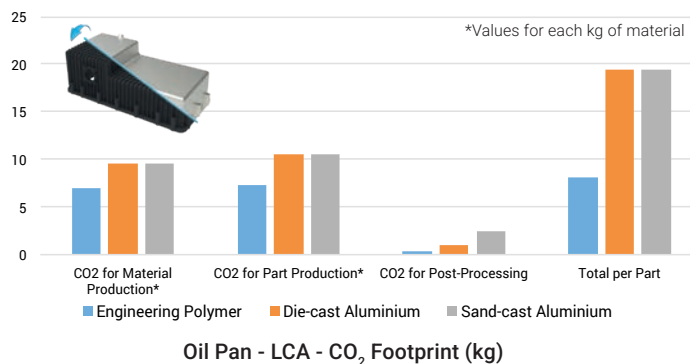

Oil Pan	Engineering Polymer	Die-Cast Aluminium	Sand-Cast Aluminium
Part Weight	1.1 kg	1.85 kg	1.85 kg

Selection of Materials for Metal Replacement

Product Name	Polymer Type	Key Features	Typical Applications
Radilon® S RV300W	PA6-GF30	<ul style="list-style-type: none"> • Very high stiffness and strength • Good surface appearance 	<ul style="list-style-type: none"> • Automotive • Consumer Goods • Industrial
Radilon® S RV500W	PA6-GF50		
Radilon® S URV300W	PA6-GF30	<ul style="list-style-type: none"> • Very high stiffness and strength • Easy flowability • Good surface appearance 	
Radilon® S URV500W	PA6-GF50		
Radilon® A RV350W	PA66-GF35	<ul style="list-style-type: none"> • Very high stiffness and strength • Developed for demanding applications 	<ul style="list-style-type: none"> • Automotive • Consumer Goods • Industrial
Radilon® A RV500RW	PA66-GF50		
Radistrong® A RV500W	(PA66+PA*) - GF50	<ul style="list-style-type: none"> • Very high stiffness and strength • Excellent surface appearance • Lower moisture absorption 	
Radistrong® Aroma RV500RK2			
Radilon® D RV500RKC	PA610-GF50	<ul style="list-style-type: none"> • Improved dimensional stability • High chemical resistance • Partially obtained from renewable sources 	<ul style="list-style-type: none"> • Industrial • Water Management
Radilon® DT RV300RK2	PA612-GF30	<ul style="list-style-type: none"> • Excellent chemical resistance • Improved dimensional stability • Very high stiffness and strength 	<ul style="list-style-type: none"> • Industrial • Consumer Goods • Water Management
Radilon® DT RV500RK2	PA612-GF50		

Successful Metal Replacement Projects



Engine Mount made of **RADILON® A RV500RW 339 BK** [PA66-GF50]

- Very high stiffness
- High fatigue resistance
- Very high strength
- Excellent heat ageing property retention



Windlass Reducer Housing made of **RADILON® DT** [PA612-GF]

- Very high stiffness
- Excellent chemical resistance
- Very high strength
- Good dimensional Stability



Road Manhole Cover made of **RADILON® S RV350W 333 BK** [PA6-GF35]

- High stiffness
- Good fatigue resistance
- High strength
- Good processability

RadiciGroup High Performance Polymers: Engineering Service



Customized technical support fuelling the success of innovative metal replacement projects, realized using our broad range of engineering materials. This is what RadiciGroup High Performance Polymers can offer its customers, thanks to its state-of-the-art computer-aided engineering (CAE) virtual simulation tools and the experience and skills of its technical specialists.



The information provided in this document corresponds to our knowledge on the subject as of the date of publication. The information may be subject to revision as new knowledge and experience become available. Data provided fall within the normal range of product properties and relate only to the specific designated material. The data may not be valid for such material if used in combination with any other material or additive, or in any process, unless otherwise expressly indicated. The data provided should not be used to establish specification limits. Such data are not intended to substitute for any testing you may need to conduct to determine the suitability of a specific material for particular purposes. Since the above-mentioned company and its affiliates cannot anticipate all the variations occurring in end-use conditions, the above-mentioned company and its affiliates make no warranties and assume no liability in connection with any use of the above information. Nothing in this publication is to be considered as a licence to operate under, or a recommendation to infringe, any patent rights. All images contained in this document are the property of their respective owners. Unauthorized use or reproduction of these images is prohibited.

RADICI NOVACIPS SpA - Via Bedeschi, 20 - IT - 24040 Chignolo d'Isola (BG)

www.radicigroup.com