



New nylon stories

A real circular choice.


Renycle® is the RadiciGroup new sustainability-oriented engineering polymers range, from post-industrial and post-consumer sources, targeted at meeting the growing needs of the market that requires products with a low and measurable environmental impact without compromising on quality, reliability, traceability, safety.

This range has a lower environmental impact than prime grade material, based on LCA (Life Cycle Assessment) indicator data, currently available for each grade. This new brand answers the growing demand for more sustainable products, guaranteeing high technical performances.

From scrap to new nylon

RadiciGroup, thanks to its long-standing know-how in material formulation and recycling, is able to convey scraps either in the same industry which originated them or in a different one. This depending on the specific characteristics of the materials and the performance expected from final applications, choosing the most sustainable solution.

This is true for post-industrial material, which is diverted from the waste stream during a manufacturing process, and for post-consumer material, which is generated by households or by commercial, industrial and institutional facilities as end-users of the product which can no longer be used for their intended purpose.

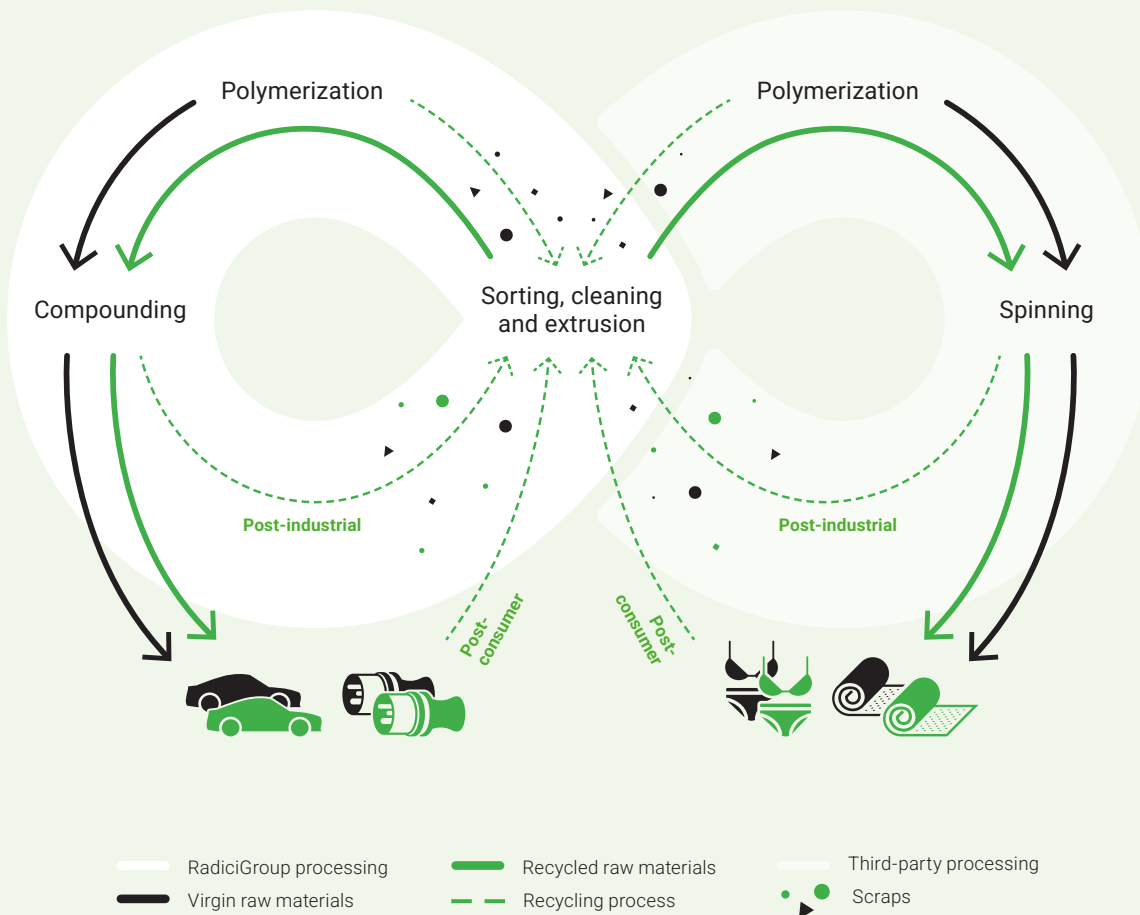


Our ecological footprint? Measured through the LCA study

The Life Cycle Assessment (LCA), regulated by ISO14040, is an integral part of the Renycle® offer. The LCA assessment focuses on determining the environmental impact resulting from the use and transformation of the resources into finished product.

This valuable contribution, developed for each Renycle® grade, is obtained following a workflow that uses, as input data, the process parameters measured directly on the RadiciGroup production plants. Periodically, surveys are carried out to determine impacts for each production step.

- The calculation takes into account:
- Raw materials
 - Energy consumption
 - Emissions
 - Use of water
 - Additives
 - Process waste production
 - Packaging
 - Transport

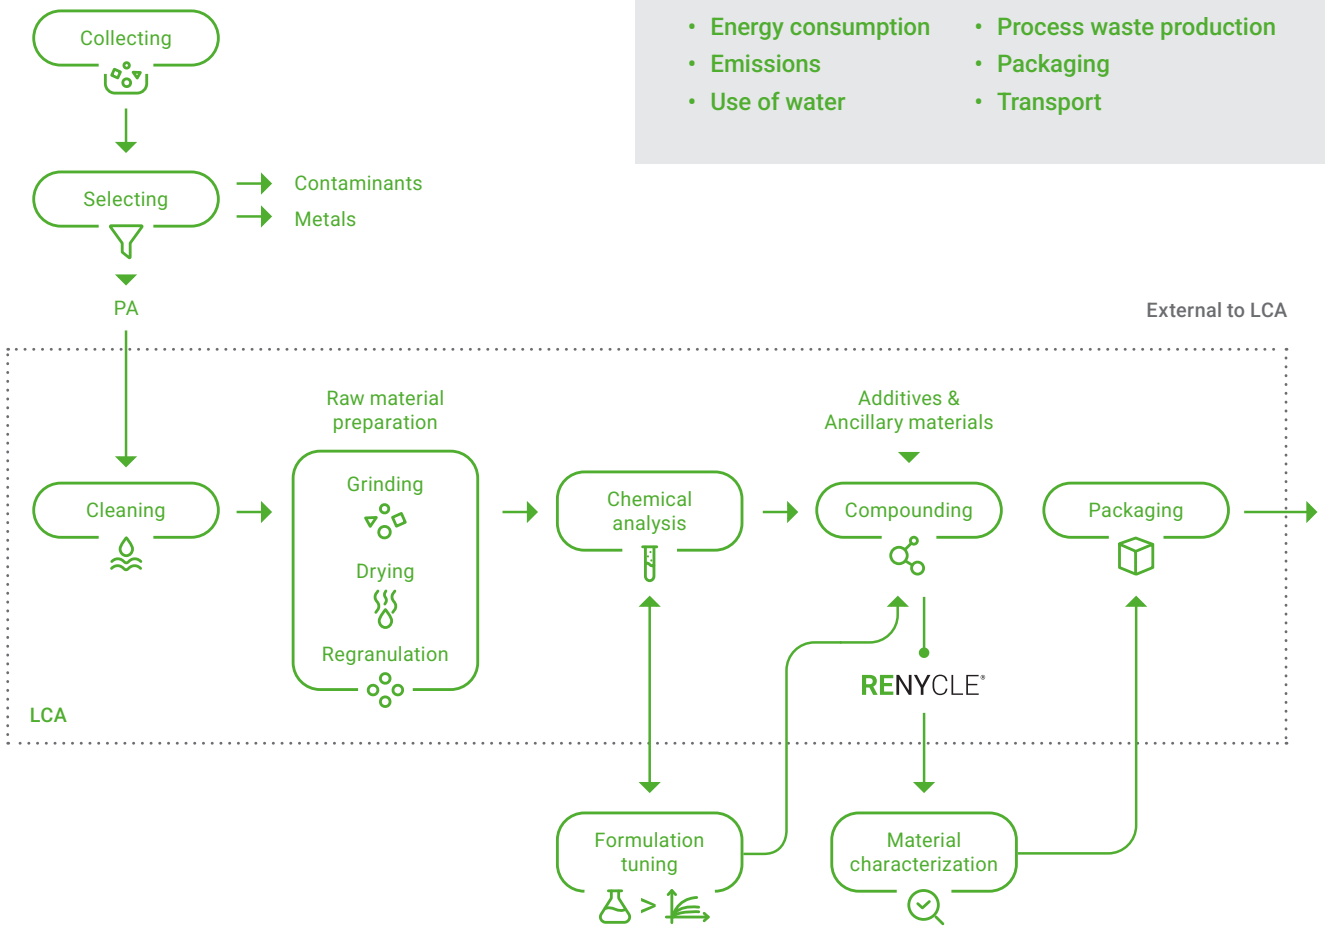

Product safety is essential


For this reason, the raw material used for the production of Renycle® is carefully selected and checked, in order to ensure its traceability and origin. Renycle® materials are subjected to strict controls to guarantee the absence of dangerous substances according to the GADSL (Global Automotive

Declarable Substance List) and the reference regulations, including:

- REACH (CE) n.1907/2006
- RoHS III (2011/65/CE)

Let's talk about performance

Thanks to the optimization of the formulations, combined with the careful selection of high quality raw materials recovered from post-industrial and post-consumer sources, Renycle® represents the range of sustainable engineering polymers whose mechanical performances, and the related variability, are maintained over time.

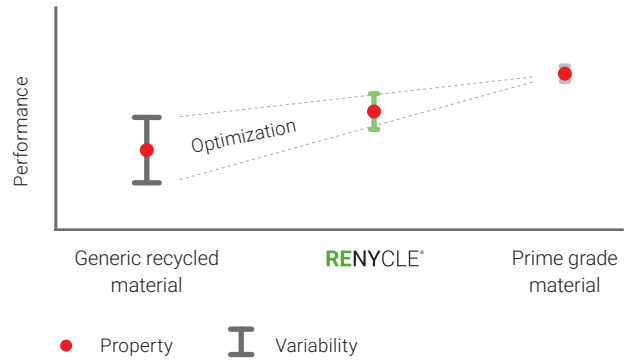


Choose the Renycle grade suitable for your application

Particular attention should be paid to applications involving structural or safety components. The graph, based on the table data, shows the tensile stress-strain curves obtained in compliance with the ISO527 standard, in DAM (Dry-As-Moulded) conditions.

The materials in comparison are a PA6-GF30 prime grade polyamide, Renycle® S GF3001K 3033BK (PA6-GF30 whose polymer base is partially recycled) and Renycle® S GF3003K

3033BK (PA6-GF30 whose PA6 polymer is recycled).

What can be seen is that as the recycled content increases, although the design of the materials aims at maintaining the properties, there is a reduction in performance compared to the first choice which is not negligible. This aspect, of fundamental importance, must be taken into consideration in the component design phase when implementing the criteria for choosing the materials.

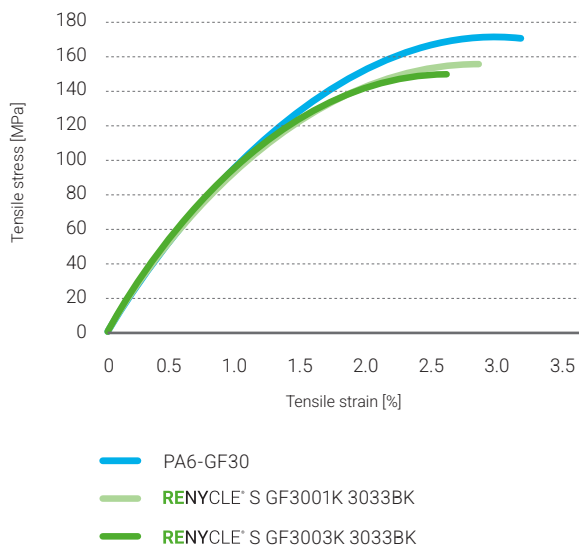

Property	PA6-GF30	RENYCLE® S		RENYCLE® S	
	Prime grade reference	GF3001K 3033BK	Δ vs prime [%]	GF3003K 3033BK	Δ vs prime [%]
Tensile modulus [MPa]	9,400	9,350	-0.5	9,500	1.1
Tensile stress at break [MPa]	165	150	-9.1	150	-9.1
Tensile strain at break [%]	3.2	3	-6.3	2,6	-18.8
Impact strength [kJ/m ²]	85	70	-17.6	75	-11.8

Example: trade-off environmental vs mechanical performances

Finished Product	Global warming potential* [kgCO ₂ eq.]	Cumulative Energy Demand* [MJ]	Stress at Break [MPa]	Strain at Break [%]	Impact Unnotched [kJ/m ₂]
PA6-GF30 (prime grade reference)	5.4	100	173	3.2	73
RENYCLE® S GF3004K 3033 BK	1.3	27	135	2.6	55
Δ [%]	-76%	-73%	-21%	-18%	-25%

*Impact Assessment Method used: IPCC 2021 GWP100 v.1.02; Cumulative Energy Demand v1.11 - Simapro v.9.5.0.1 - DB Ecoinvent 3.9.1 - Reference year 2022.

Why choose Renycle®

Renycle® gives you the opportunity to be greener in several ways:

- **A global leader:** Renycle® is a product from RadiciGroup, one of the world's leading manufacturers of polyamides, synthetic fibres and engineering polymers.
- **Performance:** Renycle®'s technological value and performance are retained unchanged over time and there is no loss into the environment.
- **No waste:** conversion of scrap eliminates the need for new raw material.
- **Green energy:** the energy consumed in Renycle® polymer production is mainly green, as it comes from renewable sources.
- **Environmental conscious choice:** Renycle® promotes a culture of reuse and recycling, with materials that can still offer high technical performances.
- **Optimization:** Renycle® is targeted at meeting the right trade-off environmental vs mechanical performances.
- **Engineering Service:** thanks to an advanced simulation software, RadiciGroup supports its customers to predict the behaviour of materials right from the very early stages of product development. The goal is to optimize design and also to take into account eco-design and environmental performance.

A number of possibilities with Renycle®

Renycle® is very versatile and can have different properties depending on the final application:

- **Flame retardant**
- **Laser markable**
- **Heat stabilized**
- **Halogen and red-phosphorus free**
- **Hydrolysis resistant**
- **Toughened**
- **Light and UV stabilized**
- **Electrically neutral**
- **High stiffness**

The Renycle® story does not end here. Its applications go on and on.

Renycle® is the ideal solution for all those sectors where creativity and high performance are required. It has countless applications in:



Automotive



E-mobility



Electrical & Electronics



Power tools



Furniture



Sport

Examples of Renycle® applications

Automotive

1. Thermal management systems


Renycle® can be used in some typical components of the automotive “thermal management systems” segment. The proposal of low environmental impact formulations is intended as an alternative to first choice homologous products (fossil origin), subject to verification of the technical requirements of the final application. This allows to reduce the overall environmental impact even in consolidated applications.

Fan shroud

Made of recycled Renycle® A GF3004K 3033 BK (PA66-GF30).
 This heat-stabilized material contains recompounded base polymer from high-quality recycled feedstock.
 This assures a limited property drop compared to the primary grade, guaranteeing a low environmental impact.




Copyright: A2MAC1

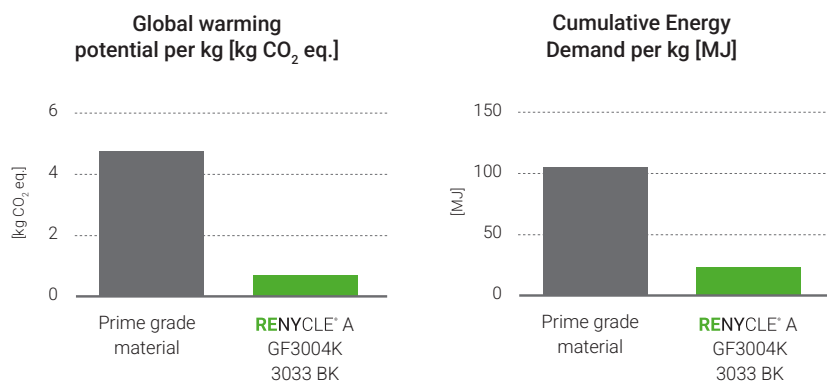


Radiator end tanks

Made of Renycle® A GF3002HR 3039BK, a product consisting of partially recycled content. The material has been specially formulated to ensure good resistance when directly exposed to engine cooling liquids.
 It is a lower environmental impact alternative to glass fibre filled PA66s, which, since years, has been the material chosen for this application

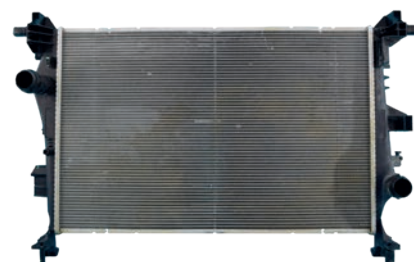

Copyright: A2MAC1

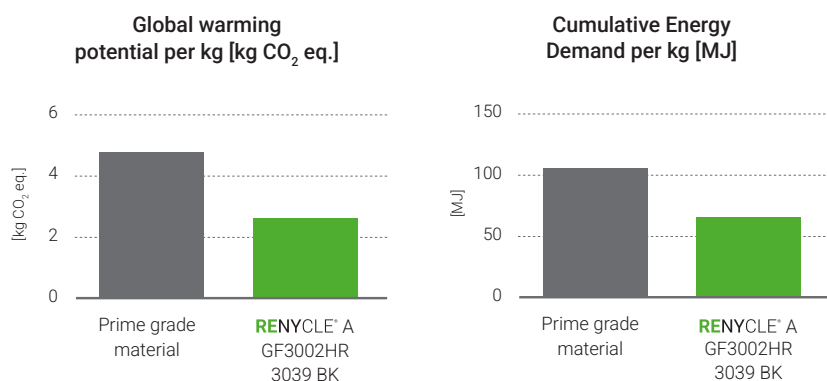

2. Power train and engine system

Also for this segment, where significant mechanical properties are required for the various components, such as resistance to exposure to high temperatures for a long time and to contact with chemicals, Renycle® products based on PA66 and PA6 are available.


Air intake manifold

Used in both diesel and gasoline engines. In this case the optimal proposal falls on Renycle® S GF3004K 3033BK (PA6-GF30) and on Renycle® A GF3504K 3033BK (PA66-GF35) recycled.

The correct selection of the source material guarantees an acceptable variability of the final properties and adequate mechanical strength to prevent breakage in situations of exposure to vibrations even at high operating temperatures and thermal shocks.



Copyright: A2MAC1

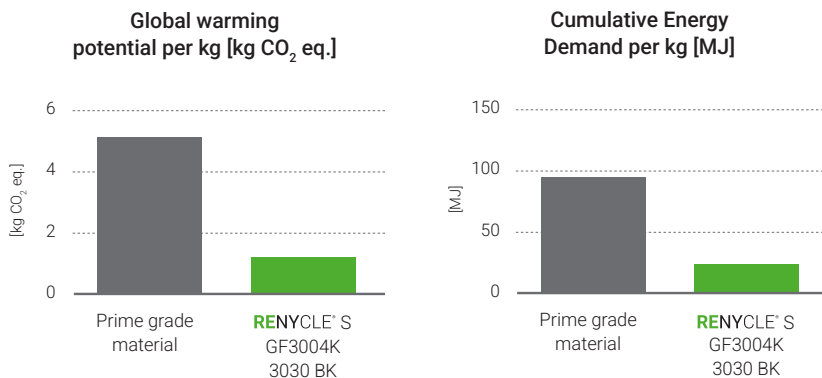

RENYCLE'S GF3004K 3033BK


Property	Dried-As-Moulded	23°C - RH50
Tensile modulus [MPa]	9,300	5,400
Tensile stress at break [MPa]	135	85
Tensile strain at break [%]	2.6	3.6
Impact strength [kJ/m ²]	55	70
Notched Impact Strength [kJ/m ²]	8	12

Engine covers

Glass and glass/mineral filled Renycle® products are a valid alternative to primary materials. Typical materials for this application are Renycle® S GFK 3003K 3033BK (PA6 (GF+MD)30) or Renycle® S GF3001K 3030BK (PA6-GF30), providing good planarity and good surface appearance.



Copyright: A2MAC1

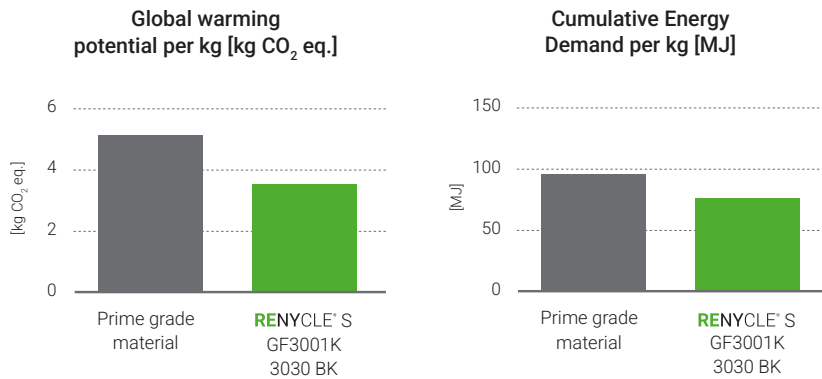

3. E/E Lighting systems

Formulations suitable for different components have been developed


Cable channels

For these applications it is possible to choose:

- Renycle® S GF1501K 3030BK (PA6-GF15): partially recycled material, reinforced with 15% glass fiber, heat stabilized and black in colour.
- Renycle® S GF1501TK 3030BK (PA6-GF15): partially recycled compound, reinforced with 15% glass fiber, heat stabilized, toughened and black in colour.
- Renycle® S T203K 3030BK (PA6-I): fiber-free formulation, recycled, heat stabilized, toughened and black.



Copyright: A2MAC1

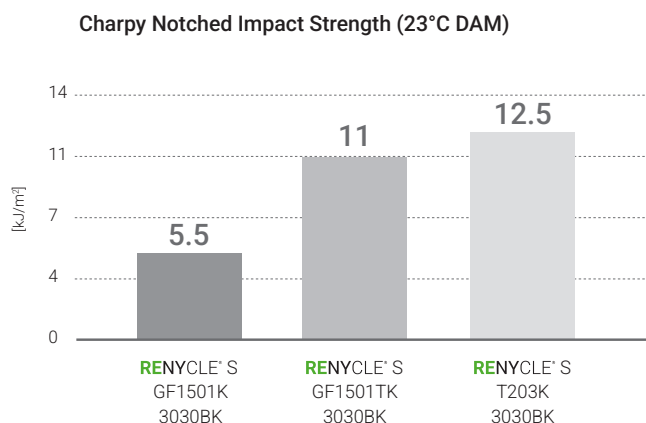

Examples of Renycle® applications

Flame retardant grade for E-mobility and electrical/electronic sector

E-mobility plug and socket components

Also in the E-mobility sector Renycle® S GF2501 HF0 3033BK is used in the production of the own components of the charging socket for electric vehicles. Among the peculiar characteristics of this partially recycled engineering polymer, are the self-extinguishing properties, excellent stiffness and dimensional stability, good aesthetics and, finally, laser markability. Also this type of products can represent a valid alternative to first choice products of fossil origin with the advantage of having a reduced environmental impact.



RENYCLE®S
GF2501 HF0 3033BK

Property	Dry-As-Moulded
Tensile modulus [MPa]	9,400
Tensile stress at break [MPa]	120
Tensile strain at break [%]	2.9
Impact strength [kJ/m ²]	50
Notched Impact Strength [kJ/m ²]	7
Flammability UL-94	V0 - 0.8 mm
Glow Wire Flammability Index (GWFI)	960°C - 1 mm
Glow Wire Ignition Temperature (GWIT)	750°C - 0.8 mm

Examples of Renycle® applications

Consumer goods

Garden tools

The Renycle® family is particularly suitable for garden tools as it allows the maximum reduction of the environmental impact without sacrificing the required mechanical and aesthetic performance.

An example of a technopolymer suitable for this kind of application is the recycled material Renycle® S GF3003 3033BK (PA6-GF30), which has characteristics suitable for molding and overmoulding of handles, inserts and levers typical of gardening tools.




Furniture

Also in this case Renycle® S GF3003 3033BK turns out to be the winning choice that combines environmental and technical performance, without forgetting the aesthetic performance that is fundamental in the furniture sector.



Sports accessories

Even in the sports and leisure sector, sustainability raises the perceived value of applications made with low environmental impact materials. In this case, the buckles and clips are made with the Renycle® S GF3003K 3033BK. The material is made of recycled polyamide 6, the reinforcement fiber is added in a percentage equal to 30% to give the right mechanical performance.

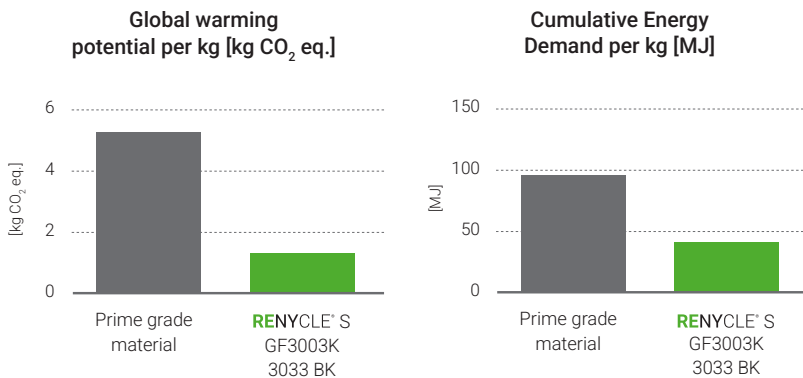

Material name (See legend)	Base Polymer	Recycled content range (on the base polymer)	Mechanical - Dry As Moulded						Physical		
			Tensile Stress at Break	Tensile Strain at Break	Tensile Modulus	Flexural Modulus	Charpy Notched Impact Strength	Charpy Impact Strength	Heat Deflection Temperature	Melting Temperature	Density
ISO Standard			527	527	527	178	179/1eA	179/1eU	75/2Af	11357-1/-3	1183
Test Conditions			23°C	23°C	23°C	23°C	23°C	23°C	1.8MPa	DSC	23°C
Unit			MPa	%	MPa	MPa	kJ/m ²	kJ/m ²	°C	°C	kg/m ³
RENYCLE [®] A GF1502K 3033BK	PA66-GF15	up to 50%	118	2.4	6,048	5,680	-	30	-	260	1,240
RENYCLE [®] A GF3002HR 3039BK	PA66-GF30	up to 50%	160	3.2	9,600	8,900	8	60	-	258	1,370
RENYCLE [®] A GF3502K 3033BK	PA66-GF35	up to 50%	170	2.3	11,200	10,600	7	58	-	265	1,400
RENYCLE [®] A GF3504K 3033BK	PA66-GF35	up to 100%	170	2.1	11,400	10,600	7	55	235	260	1,400
RENYCLE [®] A T204K 3030BK	PA66-I	up to 100%	65	35	2,400	2,400	12	-	65	260	1,120
RENYCLE [®] S GF1501K 3030BK	PA6-GF15	up to 50%	125	3.5	5,900	5,300	5.5	45	-	220	1,230
RENYCLE [®] S GF1501TK 3030BK	PA6-I-GF15	up to 50%	100	5	5,300	4,500	12	64	-	220	1,190
RENYCLE [®] S GF2501 HF0 3033BK	PA6-GF25 FR(40)	up to 50%	120	2.9	9,400	9,100	-	50	-	217	1,380
RENYCLE [®] S GF3001K 3033BK	PA6-GF30	up to 50%	150	3	9,350	7,950	8.5	70	-	217	1,350
RENYCLE [®] S GF3003 3033BK	PA6-GF30	up to 100%	150	3.4	9,500	8,300	11	75	-	220	1,360
RENYCLE [®] S GF3003TK 3033BK	PA6-I-GF30	up to 100%	120	3.2	8,300	7,500	15	70	-	220	1,330
RENYCLE [®] S GF3004K 3033BK	PA6-GF30	up to 100%	135	2.6	9,400	8,400	8	60	195	220	1,370
RENYCLE [®] S GF3501 3030BK	PA6-GF35	up to 50%	170	3.3	10,900	10,600	12	80	-	220	1,400
RENYCLE [®] S GF3501KN 3033BK	PA6-GF35	up to 50%	160	3	11,100	10,700	12	75	-	220	1,390
RENYCLE [®] S GF3503UK 3050BK	PA6-GF35	up to 100%	156	2.7	10,500	10,300	10	70	-	219	1,420
RENYCLE [®] S GF4001KN 3033BK	PA6-GF40	up to 50%	180	2.5	12,700	12,000	14	73	-	220	1,450
RENYCLE [®] S N101 3030BK	PA6	up to 50%	80	15	3,000	3,000	6	-	-	220	1,130
RENYCLE [®] S T203K 3030BK	PA6-I	up to 100%	65	35	2,500	2,450	16	Not Br.	60	220	1,120
RENYCLE [®] S GFK3003K 3033BK	PA6-GF+MD30	up to 100%	100	4	6,100	5,800	-	45	-	220	1,360

T Impact modified
K Heat stabilized (copper-based)

KN Electrically neutral and heat stabilized
HR Hydrolysis resistance

UK Ultra-violet and light stabilized
HF0 flame retarded V0

RadiciGroup. Leading materials.

RadiciGroup is a leader in the manufacture of polyamide polymers and high-performance engineering polymers, including recycled and bio-based solutions.

At the heart of our strategy are our customers.

We listen to your needs and work side by side with you to co-create innovative, reliable and value-adding solutions. Our polymers support your success across a wide range of industries: automotive, electrical and electronics, consumer and industrial goods, water management, transportation, household appliances and sport.

We are a truly global company: with our worldwide production and commercial sites, we combine central competence and vision with local presence and flawless execution, delivering both off-the-shelf and tailor-made products, as well as dedicated services.

Customer satisfaction drives everything we do, enabling long-lasting partnerships and fostering the development of increasingly sustainable applications through advanced materials. Our goal is better total cost of ownership and lower environmental impact for all our customers and end users.

Sustainability

Every day at RadiciGroup, we work to make circularity our business model. We optimize the use of materials while fine-tuning our processes, designing out waste and promoting recyclability from the earliest product design phases. We are always looking for low-impact solutions in terms of natural resources and energy. We rely on certified management systems for Quality, Health and Safety, Environment and Energy to keep our companies in line with the highest sustainability standards. Since 2004, the Group has released its Sustainability Report every year.



RADICI NOVACIPS SpA
Via Bedeschi, 20 - IT - 24040 Chignolo d'Isola (BG)
Tel. +39 035 4991311 - Fax +39 035 4994386
www.radicigroup.com
info.plastics@radicigroup.com

The information provided in this document corresponds to our knowledge on the subject as of the date of publication. The information may be subject to revision as new knowledge and experience become available. Data provided fall within the normal range of product properties and relate only to the specific designated material. The data may not be valid for such material if used in combination with any other material or additive, or in any process, unless otherwise expressly indicated. The data provided should not be used to establish specification limits. Such data are not intended to substitute for any testing you may need to conduct to determine the suitability of a specific material for particular purposes. Since the above-mentioned company and its affiliates cannot anticipate all the variations occurring in end-use conditions, the above-mentioned company and its affiliates make no warranties and assume no liability in connection with any use of the above information. Nothing in this publication is to be considered as a licence to operate under, or a recommendation to infringe, any patent rights. All images contained in this document are the property of their respective owners. Unauthorized use or reproduction of these images is prohibited.